
Siemens A56 Front Plate Replacement

This front plate can be replaced if broken or to have a more appealing cover.

Written By: Lauren Young




Step 1 — Battery

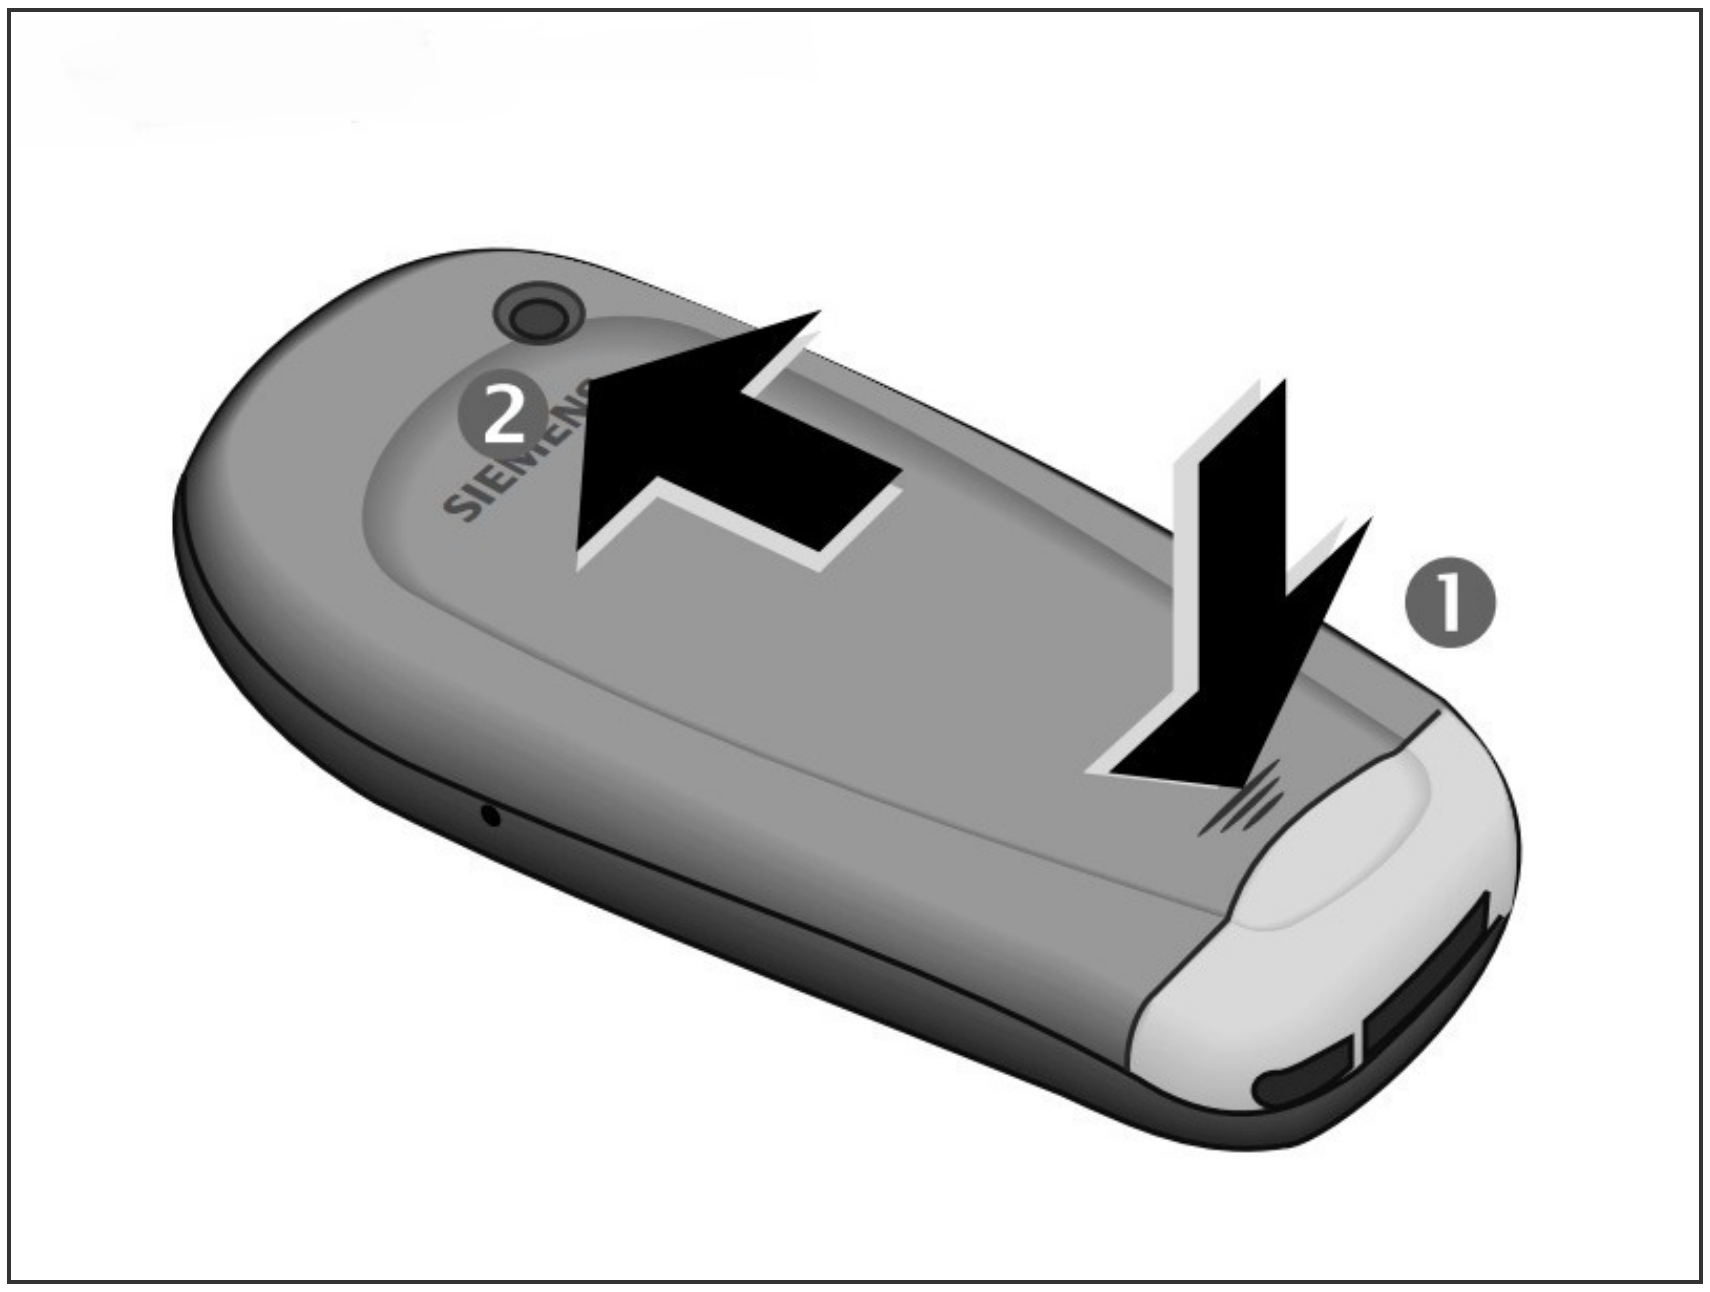

- Press down on the grooved area firmly in the direction of arrow #1.
- While maintaining the downwards pressure, push the back cover in the direction of arrow #2 until the back cover slides off.

Photos taken from: http://theinformr.com/uploads/manuals/si...

Step 2

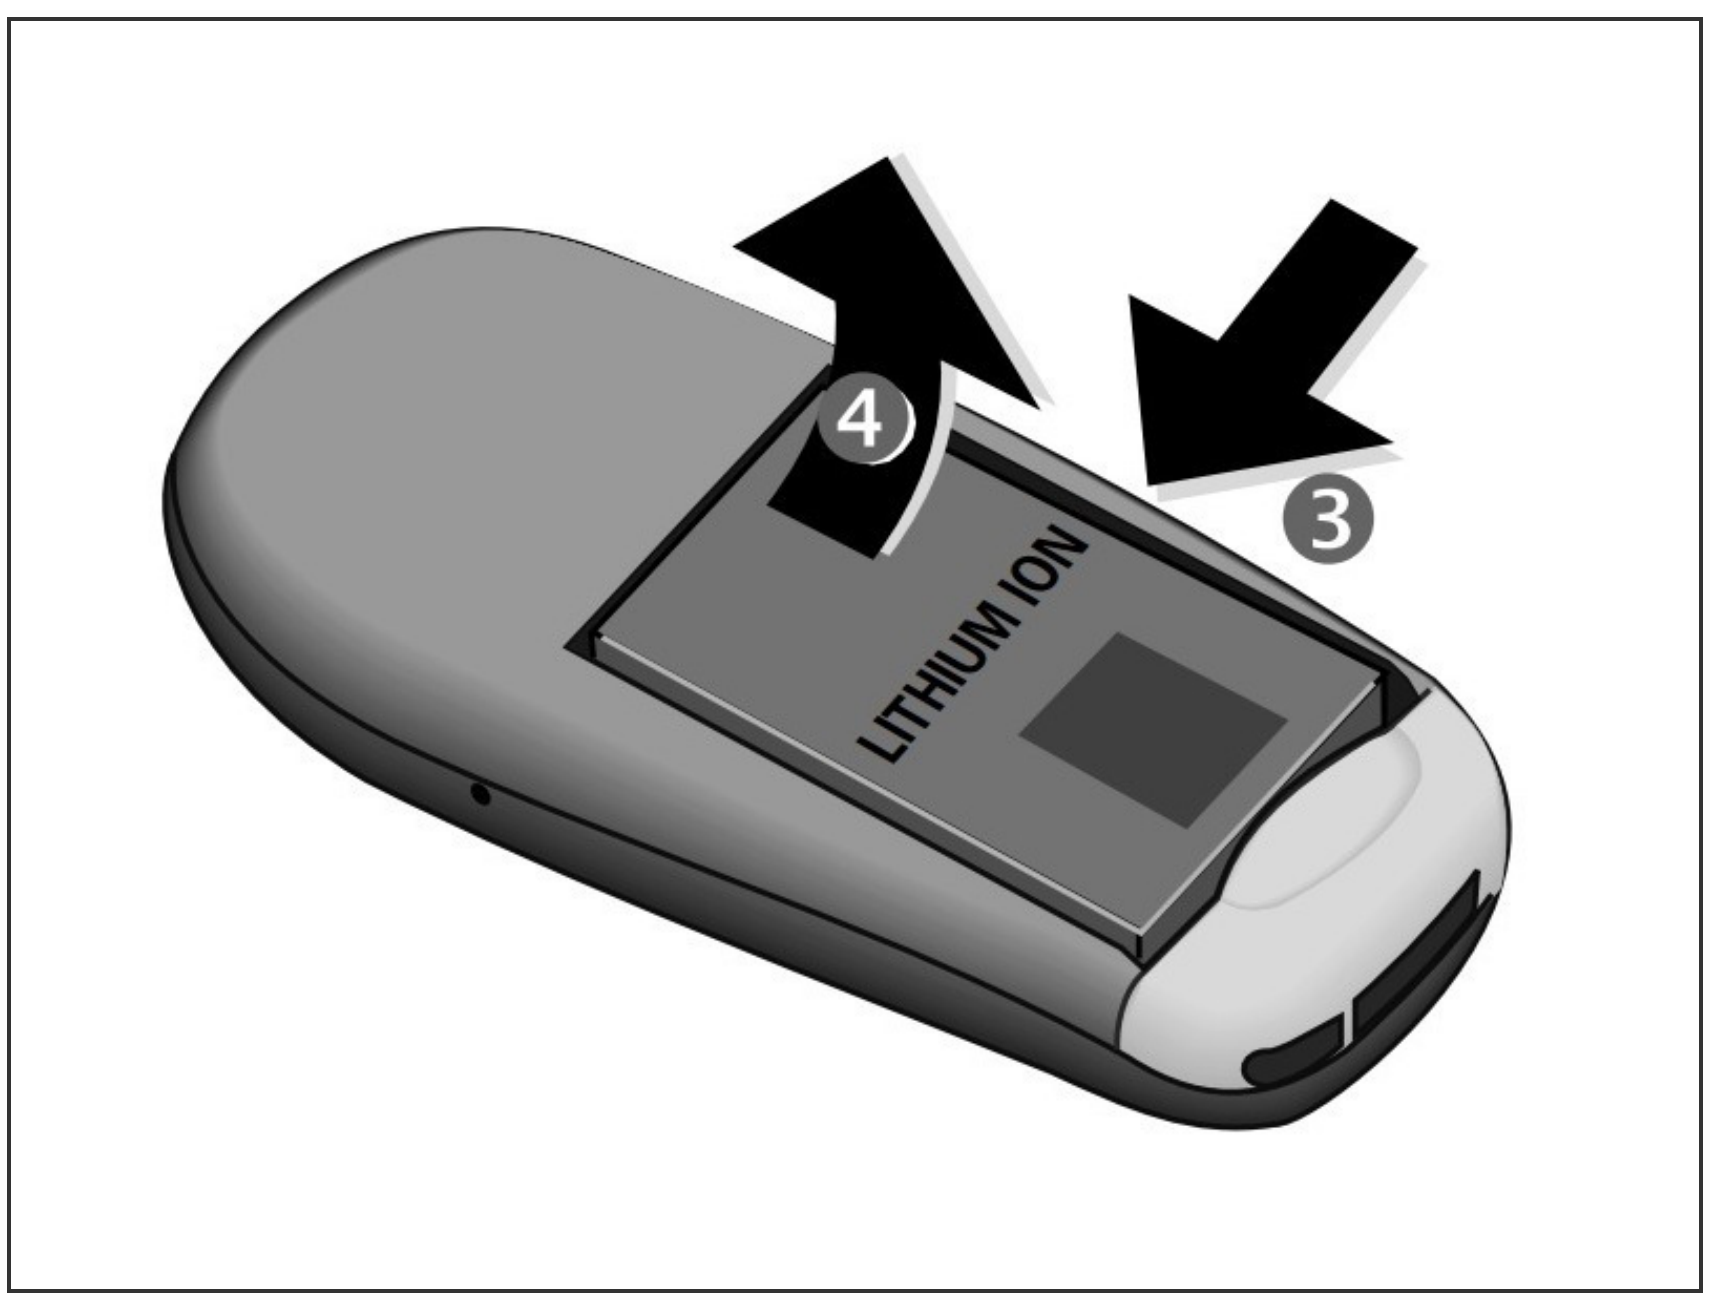

Turn off the phone before removing the battery to avoid damage.


- Press the latch on the battery in the direction of arrow #3.
- Lift battery at the cutout on the side of the phone, then tilt upwards and remove.

It may be necessary to use the tip of a fingernail or a plastic lifting tool to remove the battery.

Photos taken from: http://theinformr.com/uploads/manuals/si...

Step 3 — Front Plate



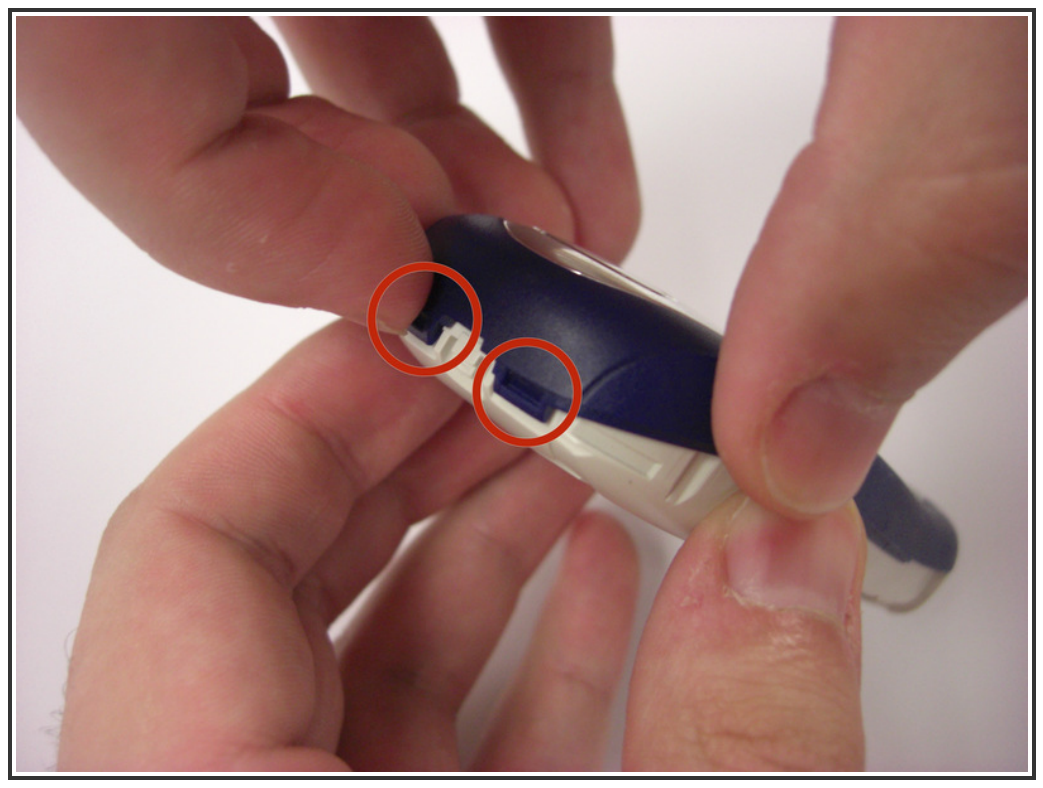



- Firmly grasp the white casing of the phone with one hand and the blue cover with the other hand as seen in the first picture.
- Pull up on the two plastic clips at the top of the phone.
- While the clips are pulled up, pull the blue cover away from the white casing to remove it.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-20 10:03:09 AM.

